




Arrow 1000 & 3000 Series

Exit Device Trim

Slip-Clutch Lever Design

- Slip-clutch is built in beneath security collar added to shank of lever.
- Available for use with SL03 and SL08 exit device trim for 1000 and 3000 Series Exit Devices. (Not available for S1150 or S1250 Series devices.)
-

Vandal-resistant slip-clutch lever releases when excessive force is applied without retracting latch. Easily reset by returning lever to horizontal position.

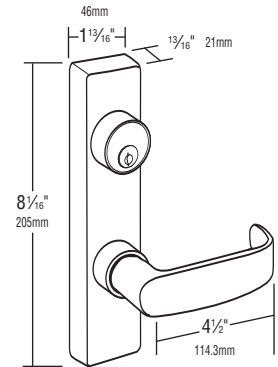

Certification & Compliance

- ANSI/BHMA A156.3, Grade 1
- Underwriters Laboratories (UL and CUL) listed for accidoors, Prefix "F" before part number.
- Made in the USA.

1700 Vertical Rod Exit Device ANSI Type 2

General Specifications

	1700	1800	1900
Chassis	Pressure formed non-ferrous alloy	Pressure formed non-ferrous alloy	Pressure formed non-ferrous alloy
Chassis and end covers	Cold drawn brass, bronze or stainless steel	Cold drawn brass, bronze or stainless steel	Cold drawn brass, bronze or stainless steel
Door Thickness	1-3/4" (44.45mm) standard, available for thick doors	1-3/4" (44.45mm) standard, available for thick doors	1-3/4" (44.45mm) standard, available for thick doors
Handing	Handed. Specify LHRB or RHRB	Handed. Specify LHRB or RHRB	Handed. Specify LHRB or RHRB
Dogging	Allen type only.	Allen type only.	Allen type only.
Top/Bottom Bolts	Brass	N/A	N/A
Latchbolt	N/A	Stainless steel, 5/8" (15.875mm) throw	Brass, 3/4" (19.05mm) throw
Crossbar Arms	Forged brass and stainless steel	Forged brass and stainless steel	Forged brass and stainless steel
Crossbar	1" (25.40mm) brass, bronze and stainless steel tubing, .062" (1.5875mm) thick	1" (25.40mm) brass, bronze and stainless steel tubing, .062" (1.5875mm) thick	1" (25.40mm) brass, bronze and stainless steel tubing, .062" (1.5875mm) thick
Crossbar projection	4-1/2" (114.3mm) neutral, 2-3/4" (69.85mm) depressed	4-1/2" (114.3mm) neutral, 2-3/4" (69.85mm) depressed	4-1/2" (114.3mm) neutral, 2-3/4" (69.85mm) depressed
Opening Height	90" (2286.00mm) standard	N/A	N/A
Fire Exit Hardware-up to:	4' x 7'2" single door 8' x 7'2" pairs of doors	4' x 7'2" single door 8' x 7'2" pairs of doors with S21 mullion	4' x 7'2" single door 8' x 7'2" pairs of doors (with 1700-FR)
Trim	See trim pages 40, 41 & 42	See trim pages 40, 41 & 42	See trim pages 40, 41 & 42
Finish	US3, US4, US10, US10B, US26, US26D	US3, US4, US10, US10B, US26, US26D	US3, US4, US10, US10B, US26, US26D